

# Palm grip B22



The palm grip B22 has different equipment options for many requirements. It is compatible with our multi-axis controller or mounted on hydraulic drives. The palm grip has a highly flexible single wire (0,1mm<sup>2</sup>, 450mm long). The mounting piece for the drive rod can be supplied with a tapped hole 7mm.

## Technical data



Operating temperature	-40°C to +60°C
Degree of protection	IP65
Contact complement	1,5 24V DC13 (*1 0,1A 24V DC13)





	B22AL	Example - 4D	W	- X
<b>Basic unit</b>				
B22L	Palm grip left			
B22R	Palm grip right			
B22AL	Palm grip left with support			
B22AR	Palm grip right with support			
<b>Digital actuating element</b>				
D	Push button KDA21 *1 Colour: red, black, yellow, green, blue, white, orange			
W*	Rocker switch T-0-T			
W*	Rocker switch 0-T			
W*	Rocker switch R-0-T			
W*	Rocker switch R-0-R			
W*	Rocker switch 0-R			
W*	Rocker switch R-R			
	<i>*Only possible with version with support!</i>			
<b>Special model</b>				
X	Special / customer specified			

**B22**

Edition:  
Push button installed Pos. 1,2,3,4

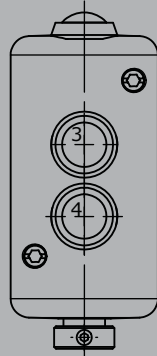
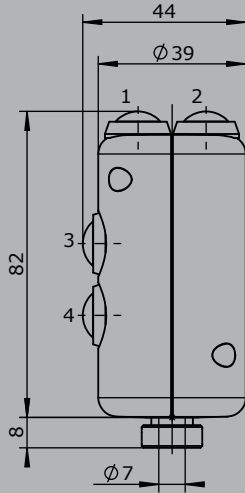


Edition:  
Push button installed Pos. 3,4,10

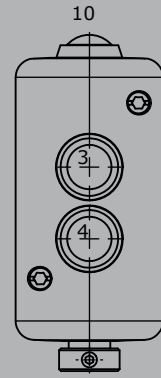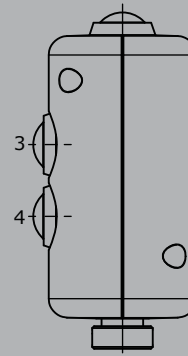

**B22A**

Edition:  
Push button installed Pos. 3,4,5,6,7,8

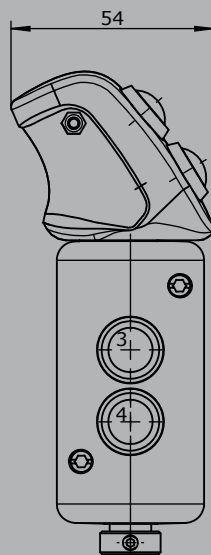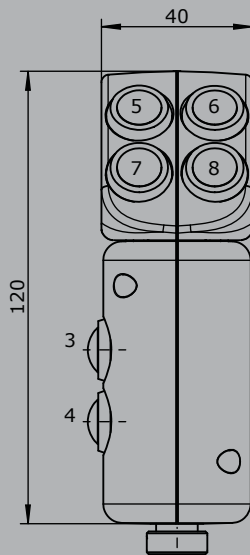

Edition:  
Push button installed Pos. 3,4,5,6,9  
Rocker switch installed Pos. 7-8

